



Essence of **Luxury** 


www.selfieporcelaintiles.com



ROCKER

COLLECTION

—
PORCELAIN
TILES

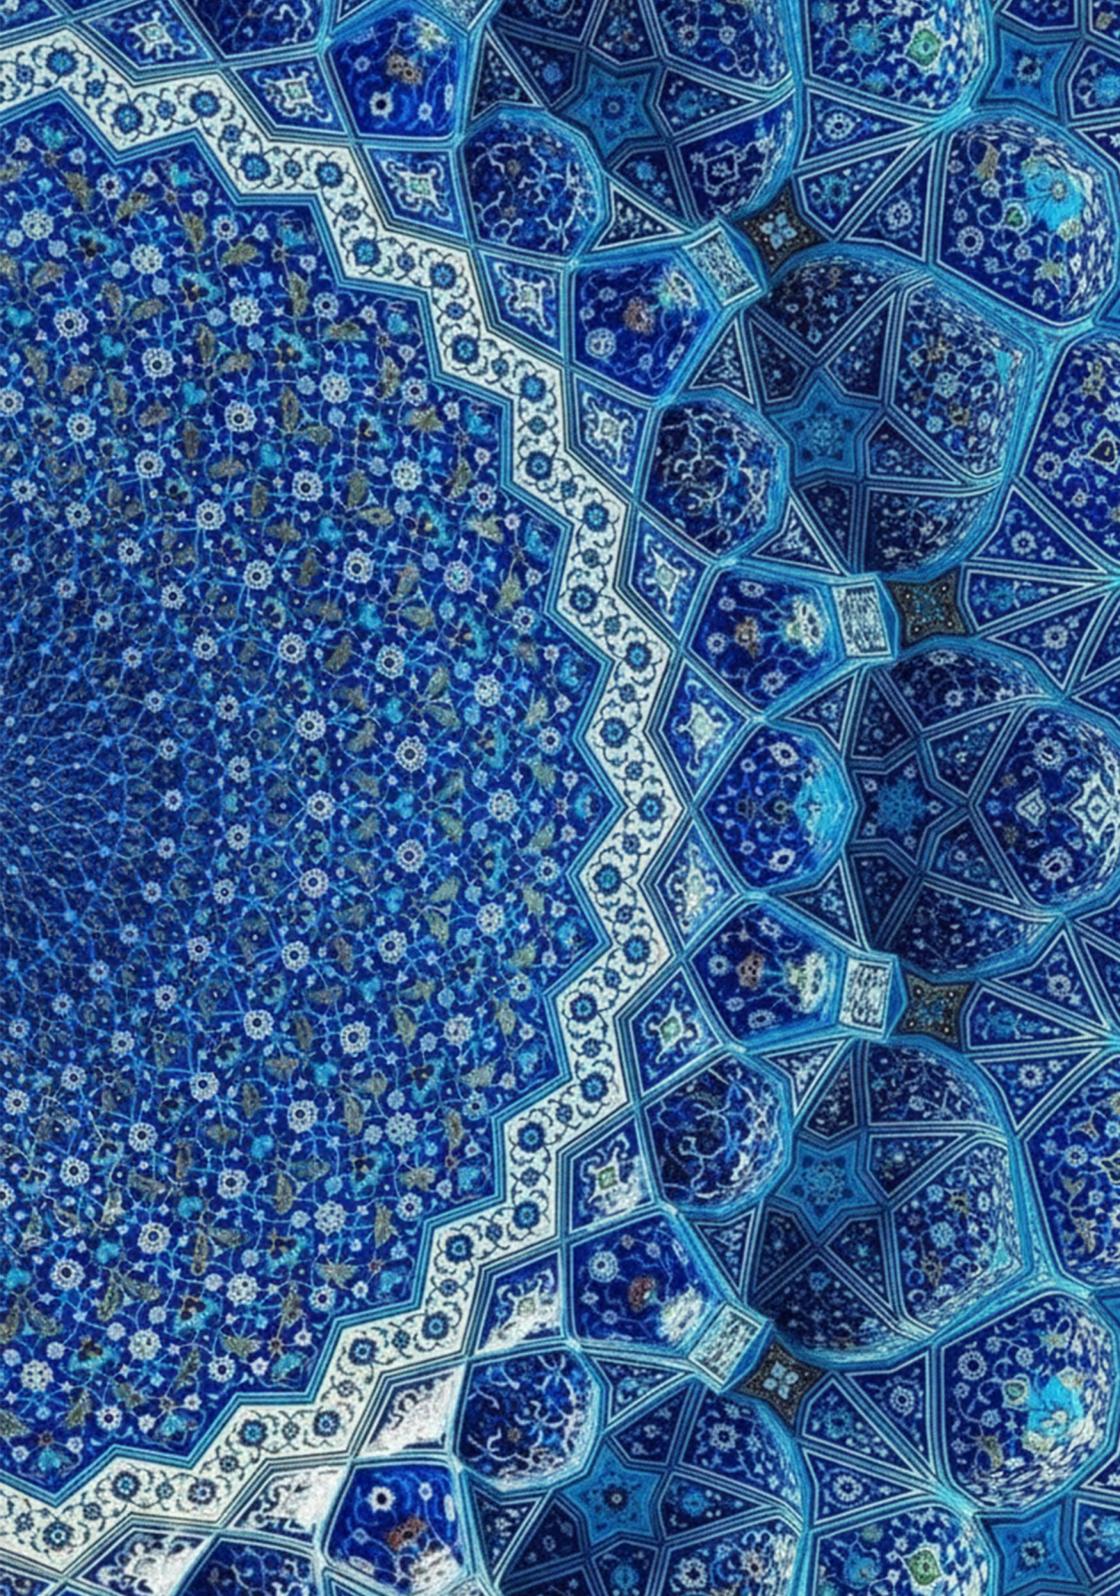

A TRAIL OF **ART**

THE LEGACY OF DESIGN, CRAFTED IN TILE

Design has always been a part of human expression shaped by history, culture, and creativity. This collection carries that legacy forward, blending timeless patterns with modern craftsmanship.

Each tile is more than just décor. It's a story of heritage, style, and artistry, crafted to bring character and beauty into every space.

PRESENTING
ROCKER
COLLECTION

**A COLLECTION THAT IS DESIGNED TO
REDEFINE THE MODERN LIVING EXPERIENCE**

The **Rocker Collection** is a tribute to the art of design, blending tradition with modern innovation. Each tile is carefully crafted to bring sophistication, elegance, and a refined sense of style into any space. With timeless patterns and lasting quality, these tiles are designed to transform interiors into works of art.

SELFIE
CERAMIC



ROCKERS

COLLECTION



DESIGN TAKES CENTER STAGE IN CONTEMPORARY INTERIORS, AND ITS ALLURE RUNS THROUGH THIS COLLECTION TO SHAPE A CAPTIVATING AESTHETIC. CRAFTED FOR EVERYDAY ELEGANCE AND ENDURING PERFORMANCE, THE SURFACE RESISTS WEAR AND IS EASY TO MAINTAIN, MAKING IT IDEAL FOR LIVING AREAS, KITCHENS, AND CORRIDORS. THE TILES ARE OFFERED IN 60×60 CM SIZE WITH 8.5 MM THICKNESS.



PORCELAIN TILES

SELFIE CERAMIC BEGAN AS AN EXPORTER AND MANUFACTURER OF PREMIUM PORCELAIN TILES AND QUICKLY EARNED RECOGNITION FOR WORLD-CLASS QUALITY AND RESPONSIVE CUSTOMER SERVICE. BUILT ON A COMMITMENT TO CRAFTSMANSHIP AND RELIABILITY, THE BRAND HAS DEVELOPED LASTING RELATIONSHIPS ACROSS GLOBAL MARKETS.

POWERED BY A HIGHLY AUTOMATED, TECHNOLOGY-DRIVEN MANUFACTURING UNIT, SELFIE CERAMIC ENSURES NEAR-ZERO HUMAN ERROR, CONSISTENT FINISHES, AND DEPENDABLE LEAD TIMES. THIS RELENTLESS FOCUS ON PRECISION, INNOVATION, AND CARE HAS POSITIONED SELFIE CERAMIC AS ONE OF THE MOST TRUSTED NAMES IN THE TILE INDUSTRY.

CHARACTERISTICS





Step into a world where imagination meets reality. This 360° visualization technology allows you to preview materials, textures, and finishes in a true-to-life environment, giving you the confidence to make the right choice for your space.

www.selfieporcelaintiles.com

360°

SCAN QR CODE
FOR IMMERSIVE VIEW



AND EXPERIENCE IT LIVE

Index

It's A Clickable Catalogue



Tap To
Explore
Each



Tap To
Back To
Index

16001

60x60 CM



16006

60x60 CM



16011

60x60 CM



16016

60x60 CM



16002

60x60 CM



16007

60x60 CM



16012

60x60 CM



16017

60x60 CM



16003

60x60 CM



16008

60x60 CM




16013

60x60 CM



16018

60x60 CM



16004

60x60 CM




16009

60x60 CM



16014

60x60 CM



16019

60x60 CM




16005

60x60 CM



16010

60x60 CM



16015

60x60 CM



ROCKER COLLECTION


 [BACK TO INDEX](#)



16001



16003

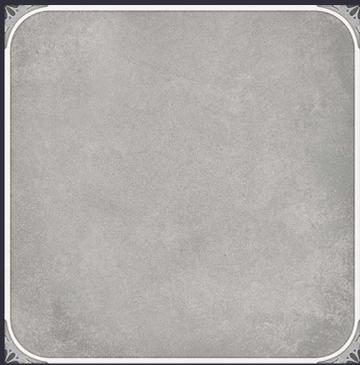

16002



16004



PRODUCT INFORMATION



600x600MM
2'x2'

MATT SURFACE





16001

MATT

 600x
600mm

ROCKER COLLECTION

 [BACK TO INDEX](#)




16005



16007



16006

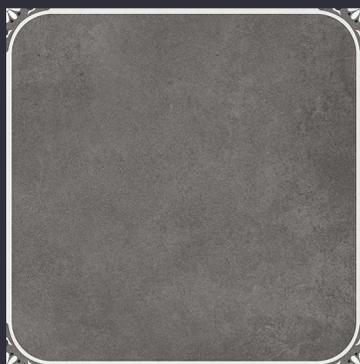

16008



PRODUCT INFORMATION



600x600MM
2'x2'

MATT SURFACE





16008

MATT



600x
600mm

ROCKER COLLECTION


 [BACK TO INDEX](#)



16009



16011

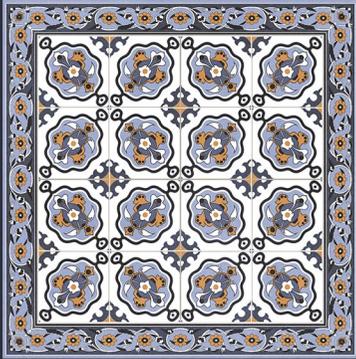

16010



16012



PRODUCT INFORMATION



600x600MM
2'x2'

MATT SURFACE





16012

MATT

 600x
600mm

ROCKER COLLECTION

 [BACK TO INDEX](#)



16013



16015



16014



16016




PRODUCT INFORMATION



600x600MM
2'x2'

MATT SURFACE

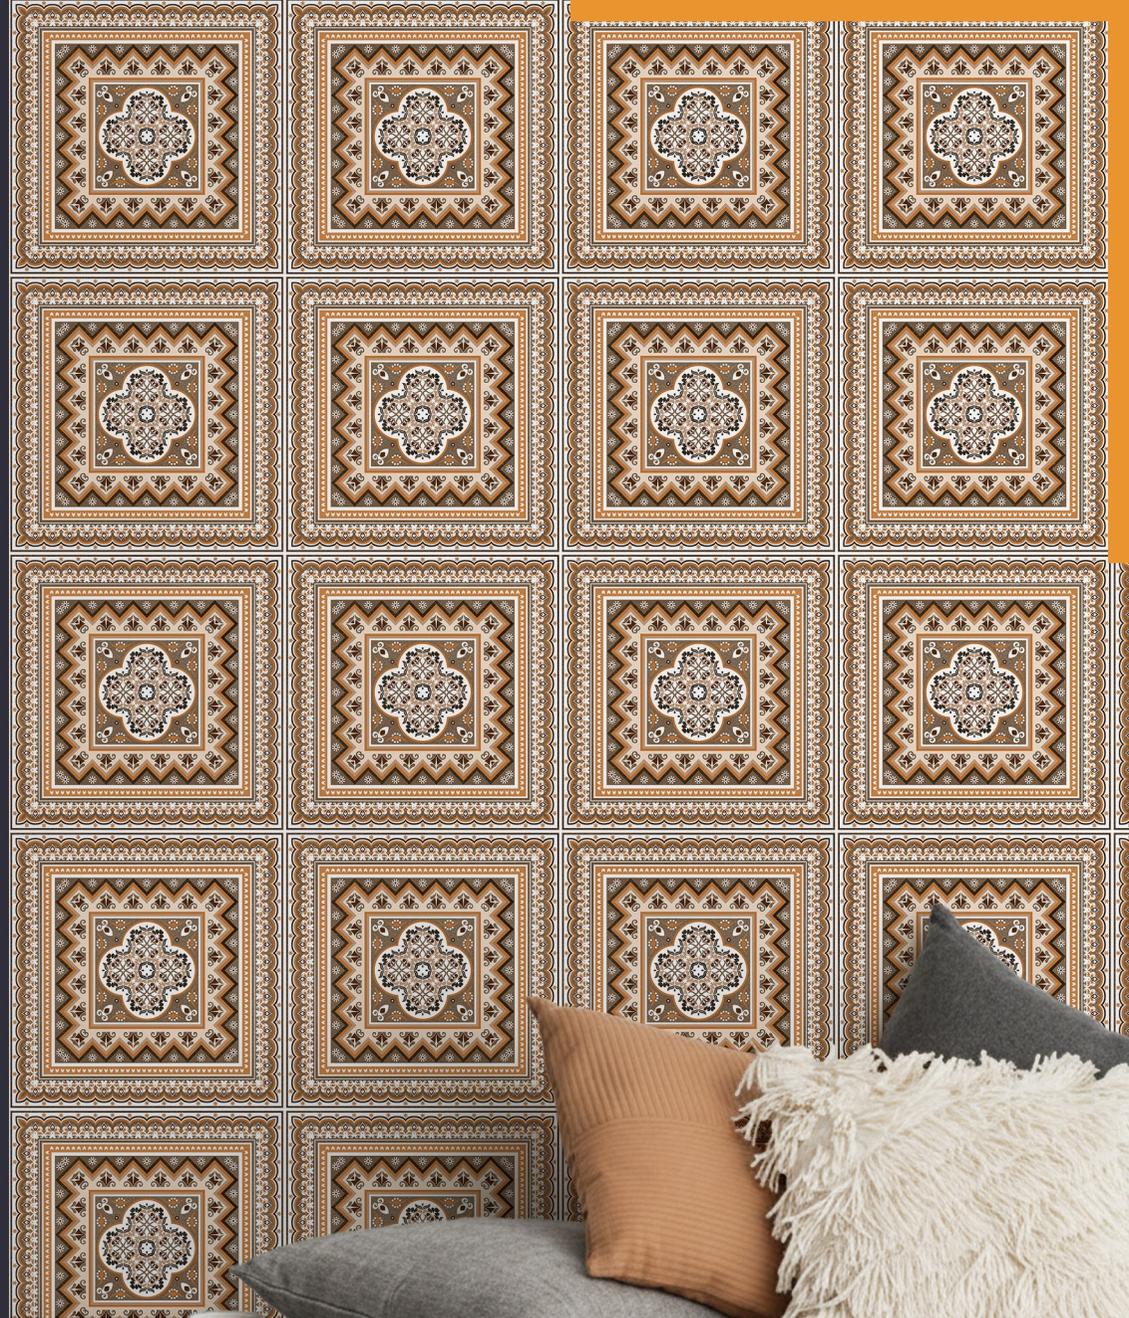




16013

MATT

 600x
600mm

ROCKER COLLECTION


 [BACK TO INDEX](#)

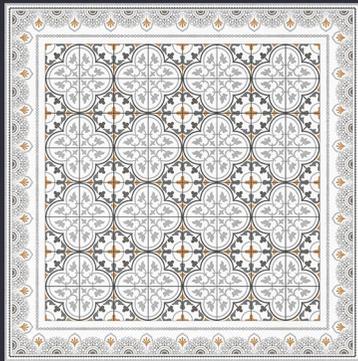

16017



16019

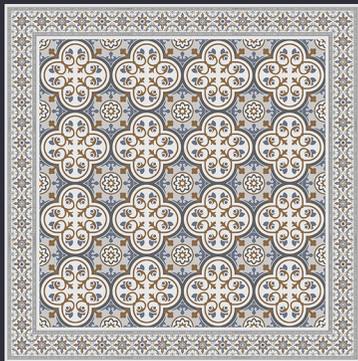

16018



PRODUCT INFORMATION



600x600MM
2'x2'

MATT SURFACE





16017

MATT

 600x
600mm

TECHNICAL SPECIFICATION

| CHARACTERISTIC | STANDARD AS PER ISO13006.2018/ EN14411 Gr.BIa | MEAN VALUE OF SELFIE | TEST METHOD |
|--|---|--|----------------|
| Regulatory Properties | | | |
| Deviation in length and width | ± 0.30% (±1.00mm) | ± 0.10% | ISO 10545-2 |
| Deviation in thickness | ± 5.00% (±0.50mm) | ± 4.00% | ISO 10545-2 |
| Straightness in side | ± 0.30% (±0.80mm) | ± 0.10% | ISO 10545-2 |
| Rectangularity | ± 0.30% (±1.50mm) | ± 0.10% | ISO 10545-2 |
| Surface flatness central curvature | ± 0.40% (±1.80mm) | ± 0.20% | ISO 10545-2 |
| Surface flatness edge curvature | ± 0.40% (±1.80mm) | ± 0.20% | ISO 10545-2 |
| Surface flatness warpage | ± 0.40% (±1.80mm) | ± 0.10% | ISO 10545-2 |
| Surface quality | > 95% defects free | > 95% defects free | ISO 10545-2 |
| Small Color Difference (For Plain Color) | ΔE < 1.00 | ΔE < 0.30 | ISO 10545-16 |
| Glossiness (Polished) | as per mfg. | Gloss Value > 90 | Glossmeter 60° |
| Glossiness (Matt) | as per mfg. | 3° < GLOSS < 7° | Glossmeter 60° |
| Glossiness (satin/Posh) | as per mfg. | 7° < GLOSS < 18° | Glossmeter 60° |
| Structural Properties | | | |
| Water absorption | 0.50% ≤ Ev ≤ 3.00% | 0.060% ≤ Ev ≤ 3.00% | ISO 10545-3 |
| Bulk density | as per mfg. | > 2.28 gm/cc | ISO 10545-3 |
| Massive Mechanical Properties | | | |
| Modulus of rupture | Min. 30.0 N/mm ² | Min. 35.0 N/mm ² | ISO 10545-4 |
| Breaking strength thickness ≥7.5 | Min. 700.0 N | Min. 1000.0 N | ISO 10545-4 |
| Breaking strength thickness ≥7.5 | Min. 1100.0 N | Min. 1300.0 N | ISO 10545-4 |
| Breaking strength thickness ≥7.5(For ≥15mm) | Min. 1100.0 N | Min. 1800.0 N | ISO 10545-4 |
| Surface Mechanical Properties | | | |
| MOH'S hardness | as per mfg. | Polished Min 4* / Satin, Posh & Matt Min 6 | BS EN 15771 |
| Surface abrasion resistance | as per mfg. | Polish Min. Class 2, Satin & Posh Min. Class 3, & Matt Min. Class 4 | ISO 10545-7 |
| Deep abrasion resistance | Max. 175mm ³ | Max. 132mm ³ | ISO 10545-6 |
| Thermal Hydrometric Properties | | | |
| Moisture expansion | Max. 0.06%(0.6mm/m) | 0.02mm/m | ISO 10545-10 |
| Thermal expansion (COE) at 100°C | as per mfg. | Max. 6.0 x 10 ⁻⁶ | ISO 10545-8 |
| Thermal shock resistance | Min. 10 Cycle | Min. 10 Cycle | ISO 10545-9 |
| Impact resistance(COR) | Min. 0.55 | Min. 0.55 | ISO 10545-5 |
| Frost resistance | as per mfg. | Frost Proof | ISO 10545-12 |
| Chemical Properties | | | |
| Resistance to staining glazed | Min. Class 3 | Min. Class 4 | ISO 10545-14 |
| Resistance to household chemicals & swimming pool salts glazed | Min. Class GB | Min. Class GA | ISO 10545-13 |
| Resistance to low concentrate acid and alkalis glazed | as per mfg. | Min. Class GLA** | ISO 10545-13 |
| Resistance to high concentrate acid and alkalis unglazed | as per mfg. | Min. Class GHB** | ISO 10545-13 |
| Safety Properties | | | |
| Skid resistance (COF-WET PENDULAM)## | as per mfg. | Glossy PO(<12), Satin, Posh ≥P1(12-24) Matt ≥P2(25-34) | BS 7976-2 |
| Slip resistance - (Satin / Matt (DCOF) (R value)## | as per mfg. | R9 to R13** | DIN 51130 |
| Fire resistance | as per mfg. | Fire Proof | N.A. |



PACKING DETAILS

| PRODUCT | SIZE | THICKNESS | TILES/BOX | COVERAGE AREA/BOX | WEIGHT |
|----------|---------------|-----------|-----------|-------------------|-------------------|
| GVT-PGVT | 600x 600mm | 8.5mm | 4 pcs. | 1.44 sq. mtr. | 25 KG (APPROX) |

Sr. No. 513/P2, Nr. Khokhara
Hanuman Temple,
Rangpar(Bela), Gujarat, 363642

✉ info@selfieporcelaintiles.com
www.selfieporcelaintiles.com